

# FLS M9.20

Battery powered flow monitor



# FLS M9.20

FLS M9.20 is a smart battery-powered flow monitor designed to convert the frequency signal of FLS sensors into flow rate. The M9.20 monitor is equipped with a high range lithium battery that also powers the sensors. The large 4" display shows the measured values with extreme clarity. The main parameters can be configured with a first wizard. For calibration or alignment using an extremely user-friendly in-line calibration procedure, a reference flow rate can be used. A safety icon notifies you when it is time to replace the battery and the instrument automatically stores all the main parameters. A 10-character string allows you to customise the display of the monitor with ease. The M9.20 monitor is equipped with a USB port that facilitates the updating of the software by the end user.

## BATTERY POWERED FLOW MONITOR

### APPLICATIONS

- Remote distribution systems
- Mobile monitoring systems
- Irrigation and fertilization
- Reclamation of aquifers
- Swimming pools and spas
- Liquid dispensing systems

### MAIN CHARACTERISTICS


- Large display
- Long battery life
- Installation flexibility
- Multilingual menu
- When the battery is replaced the data are not lost
- USB port for software upgrade

### TECHNICAL DATA

<b>General information</b>	<b>Compatible sensors:</b> FLS Coil effect with frequency output and FLS Reed effect <hr/> <b>Materials:</b> – Case: ABS – Display: PC – Panel and wall gasket: silicone rubber – 5-button keyboard: silicone rubber <hr/> <b>Display:</b> – Transflective technology – Update rate: 1 second – Protection class: IP65 front <hr/> <b>Flow input range (frequency):</b> from 0.5 to 500 Hz <b>Flow input accuracy (frequency):</b> 0.5%
<b>Electrical data</b>	<b>Supply voltage:</b> 3.6 Volt Lithium Thionyl Chloride battery, size C, 8.5 Ahr 3 <hr/> <b>Max electrical consumption:</b> < 400 µA <hr/> <b>FLS Coil effect flow sensor power supply:</b> – 3.6 Volts
<b>Environmental data</b>	<b>Operating temperature:</b> from -5°C to 60°C (from 23°F to 140°F) <hr/> <b>Storage temperature:</b> from -10°C to +80°C (from -14°F to +176°F) <hr/> <b>Relative humidity:</b> from 0 to 95% not condensing
<b>Standards &amp; Approvals</b>	Manufactured under ISO 9001 Manufactured under ISO 14001 CE RoHS Compliance EAC

## ELECTRICAL CONNECTIONS

Rear view of electrical connections

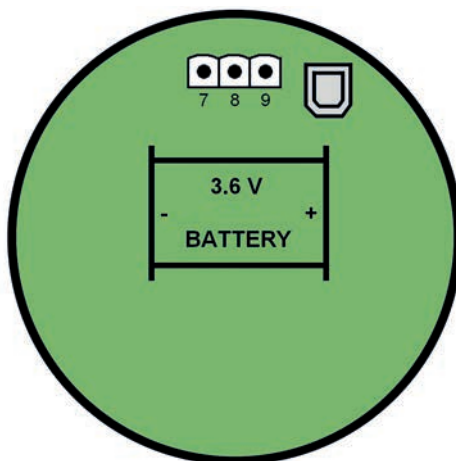

9	V+
8	FREQ IN
7	GND

Flow Sensor

# PRODUCT CODES



## M9.20.PX - M9.20.WX

Battery Powered Flow Monitor

Code	Mounting	Power supply	Sensor Input	Weight (gr.)
M9.20.P1	Panel	Battery Powered	Flow (Frequency)	500
M9.20.W1	Wall	Battery Powered	Flow (Frequency)	550

## M9.20.XX

Battery Powered Flow Monitor Field Mounting

Code	Sensor Input	Length	Main Wetted Materials	Weight (gr.)
M9.20.01	Flow (Frequency)	L0	C-PVC EPDM	550
M9.20.02	Flow (Frequency)	L0	C-PVC FKM	550
M9.20.03	Flow (Frequency)	L1	C-PVC EPDM	550
M9.20.04	Flow (Frequency)	L1	C-PVC FKM	550
M9.20.05	Flow (Frequency)	L0	PVDF EPDM	550
M9.20.06	Flow (Frequency)	L0	PVDF FKM	550
M9.20.07	Flow (Frequency)	L1	PVDF EPDM	550
M9.20.08	Flow (Frequency)	L1	PVDF FKM	550
M9.20.09	Flow (Frequency)	L0	316L SS EPDM	600
M9.20.10	Flow (Frequency)	L0	316L SS FKM	600
M9.20.11	Flow (Frequency)	L1	316L SS EPDM	600
M9.20.12	Flow (Frequency)	L1	316L SS FKM	600